

i-Drive

PC Card Drive with SCSI-2 interface (internal)


- ◆ PC Card Drive with standard 3.5" case and 50-pin SCSI-2 interface; data connector with 2.54 mm pin spacing
- ◆ Double slot at the front for PC Card memory media such as SRAM and ATA PC Cards or HDDs (2 x Type I or II or 1 x Type III)
- ◆ Compatible with CompactFlash or Smart Media Cards, MultiMediaCards, SD Cards, Microdrive miniature hard disks, Memory Sticks or xD-Cards using the appropriate PC Card adapter
- ◆ Suitable for all operating systems with SCSI support, for example Windows 95/98, NT, ME, 2000 and XP, MS-DOS, Linux, OS/2 and Apple Macintosh
- ◆ High speed data transfer – up to 10 MB/s (synchronous) or 5 MB/s (asynchronous)
- ◆ Firmware update can be done via software
- ◆ Support hotline and rapid service directly from the manufacturer



24 Months Warranty



PC Card adapters let you use a wide range of memory media

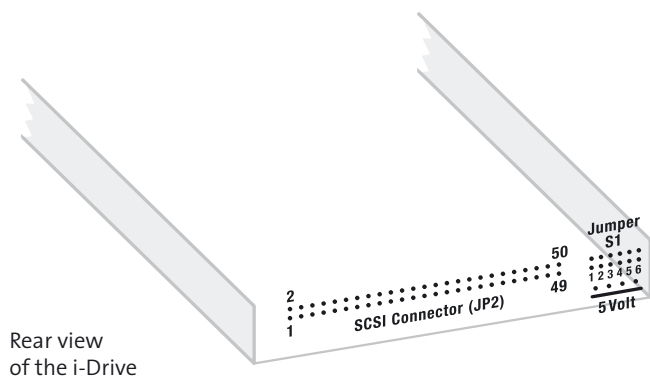

Technical Specifications

Item no. 25AL101

Hardware		Environmental Specifications	
– Interface	SCSI-2 (Fast SCSI); 8-bit single-ended; standard SCSI 50-pin, 2.54 mm pin spacing	– Temperature	0° to +70°C (operating) –40° to +75°C (non-operating)
– Memory card slots	2 x Type I or II, or 1 x Type III PC Card	– Humidity	0% to 90%, non-condensing
– Dimensions	LxWxH: 149 x 101.6 x 25.4 mm; standard 3.5" drive dimensions	Software	
Electrical		– Supported OS	e.g. Windows 95/98, NT, ME, 2000, XP, MS-DOS, Unix, Linux, MacOS
– DC input voltage	5 Volt ±5%	System Performance	
– Power consumption	150 mA (w/o memory)	– Data Transfer Rate	max. 10 MB/s (synchronous) max. 5 MB/s (asynchronous)

altec ComputerSysteme GmbH
Bayernstr. 10 · 30855 Langenhagen · Germany
Phone +49-511-9 83 81-0 · Fax +49-511-9 83 81-49
eMail: info@altec-cs.de
Web: www.altec-cs.com

